


Enteränge	Digital inputs for potential-free wiring ON: Open OFF: Input switched to GND
Insulation	Ethernet 1.5kVDC InputsI/O 3.7kVrms
Environment	Temperature 0°C to +45°C Rel. Humidity 10-90%
Network	LAN 10/100 Base-TX
Power supply	PoE (Class 2) or external power supply 12-30VDC, 4.5Watt
Housing	72 x 123 x 35 mm (DIN rail mounting)
Scope of delivery	KIO7053, 3m patch cable, power connection cable, manual
Approval	CE
Accessories	Power supply unit or PoE injector if no PoE supply is available.

Terminal assignment



Wiring (potential free)

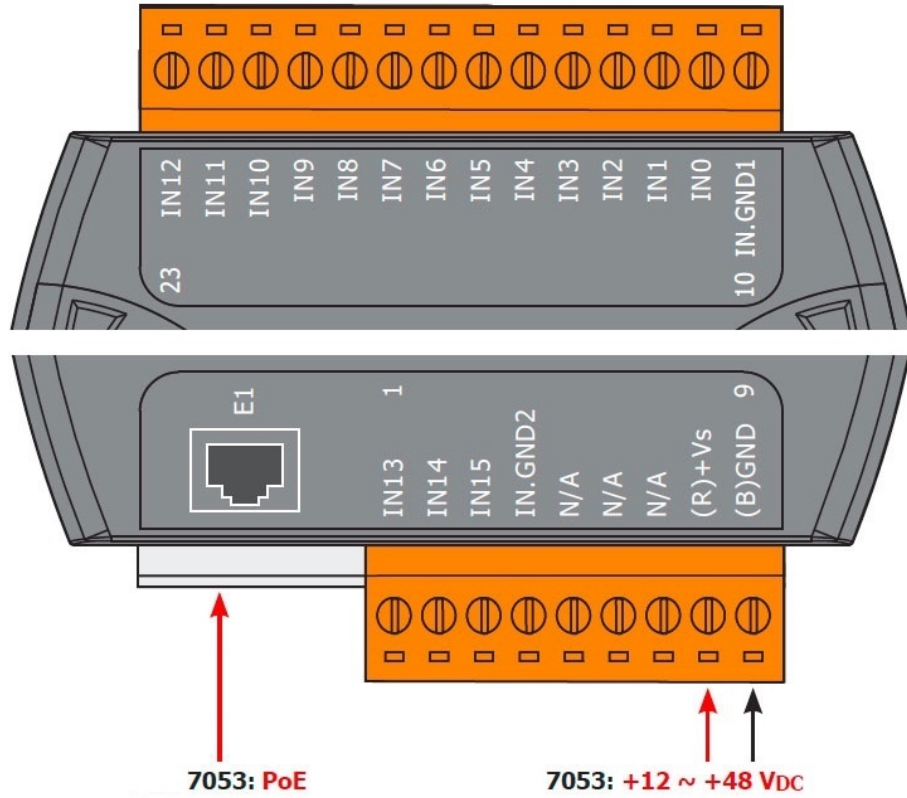